

Power Supply *IU AC Input AT Type*

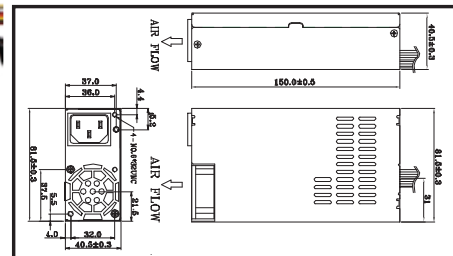
ACE-916A/AP

1
Application
Server
Platform2
Single
Board
Computer3
IBX Series
POS PC4
AFOLUX
POS
Panel PC5
Video
Capture
Card6
KAMIO
RISC7
IOVU
Open HMI8
VITO
Universal
Controller9
DINO
BLADE10
LCD
Product
Series11
Embedded
System12
Industrial
Computer
Chassis13
Power
Supply14
Peripherals

Input Type	90 ~ 132VAC, 180 ~ 264VAC Auto Range (ACE-916A) 90 ~ 264VAC Full Range (ACE-916AP)				
Output Voltage	+5V	+12V	-5V	-12V	+24V
ACE-916A	15A (1A min)	10A (0.2A min)		0.3A	
ACE-916AP	16A (1A min)	6A (0.5A min)		0.3A	
Efficiency	70% (ACE-916A), 68% (ACE-916AP)				
Temperature	0 ~ 50°C (Operating), -20 ~ 80°C (Storage)				
MTBF(hrs)	100,000				
Output Connector	P8P9, FDD and 3 x HDD				
Dimensions	150 x 81.5 x 40.5 mm				

**PFC**

Dimensions

150W

Ordering Information

- **ACE-916A-RS**
150W AC-DC AT Power Supply
- **ACE-916AP-RS**
150W AC-DC AT Power Supply, with PFC

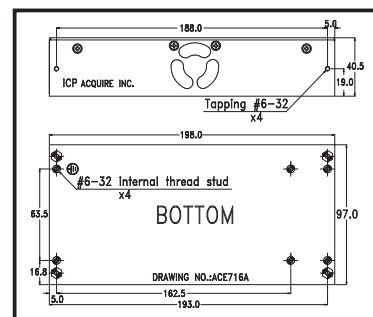
ACE-716A/AP

6
KAMIO
RISC7
IOVU
Open HMI8
VITO
Universal
Controller9
DINO
BLADE10
LCD
Product
Series11
Embedded
System12
Industrial
Computer
Chassis13
Power
Supply14
Peripherals

Input Type	85 ~ 135VAC, 180 ~ 265VAC Auto Range (ACE-716A) 85 ~ 265VAC Full Range (ACE-716AP)				
Output Voltage	+5V	+12V	-5V	-12V	+24V
ACE-716A	18A (1A min)	4A	0.5A	1A	
Efficiency	75%				
Temperature	Operating : -20 ~ 70°C (50 ~ 70°C derating curve) Storage : -20 ~ 85°C				
MTBF(hrs)	149,000				
Output Connector	Optional cable				
Dimensions	198 x 97 x 40.5 mm				

**PFC**

Dimensions

150W

Ordering Information

- **ACE-716A-RS**
150W AC-DC AT Power Supply
- **ACE-716AP-RS**
150W AC-DC AT Power Supply, with PFC

Optional 1 AC Input Solution

PN: CB-643EC-RS
20 cm AC input cable with I/O connector and fuse



Optional 2 Embedded Solution

PN: CB-716EB-RS
30 cm DC cable to CPU card with 4-pin 12 V CPU, SATA and 2 x HDD connectors



Optional 3 ATX Backplane Solution

PN: CB-716BP-RS
30 cm DC cable to backplane with 20-pin ATX, HDD and SATA connectors



Optional 4 AT P8P9 Backplane Solution

PN: CB-716P8P9-RS
30 cm DC cable to backplane with 20-pin ATX, HDD and SATA connectors



ACE-540A

Input Type	85 ~ 264VAC Full Range				
Output Voltage	+5V	+12V	-5V	-12V	+24V
ACE-540A					1.7A
Efficiency	70%				
Temperature	Operating : -20 ~ 70°C (50 ~ 70°C derating curve) Storage : -40 ~ 85°C				
MTBF(hrs)	370,000				
Output Connector	N/A				
Dimensions	161 x 100 x 40 mm				

Ordering Information

- **ACE-540A-RS**
40W AC-DC AT Power Supply, only output +24V

Dimensions

40W