

Power Supply

1U AC Input ATX Power Supply

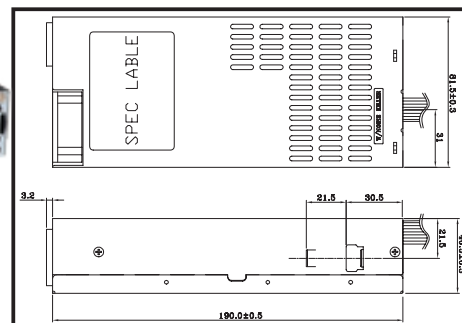
ACE-818APM **Medical**

1
Application
Server
Platform2
Single
Board
Computer3
IBX Series
POS PC4
AFOLUX
POS
Panel PC5
Video
Capture
Card6
KAMIO
RISC7
IOVU
Open HMI8
VITO
Universal
Controller9
DINO
BLADE10
LCD
Product
Series11
Embedded
System12
Industrial
Computer
Chassis13
Power
Supply14
Peripherals

Input Type	90 ~ 265 VAC Full Range					
Output Voltage	+3.3 V 16.8 A (0.3 A min)	+5 V 12 A (0.5 A min)	+12 V 12 A (1.5 A min)	-5 V 0.8 A	-12 V 0.8 A	+5 Vsb 2 A
Efficiency	68 %					
Temperature	0 °C~ 50 °C (Operating), -20 °C~ 80 °C (Storage)					
MTBF(hrs)	100,000					
Output Connector	20-pin ATX, 4-pin 12 V CPU, 2 x FDD and 3 x HDD					
Dimensions	190 x 81.5 x 40.5 (mm)					

CB    **PFC**

Dimensions

180W

Ordering Information

Part No.	Description
ACE-818AP-RS	180W AC-DC 1U ATX Power Supply with PFC, meet Medical standard

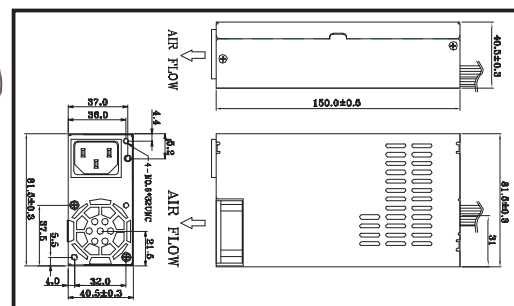
ACE-4518AP/816A

6
KAMIO
RISC7
IOVU
Open HMI8
VITO
Universal
Controller9
DINO
BLADE10
LCD
Product
Series11
Embedded
System12
Industrial
Computer
Chassis13
Power
Supply14
Peripherals

Input Type	90 ~ 265VAC Full Range (ACE-4518AP) 95 ~ 132VAC or 181 ~ 264VAC (ACE-816A)					
Output Voltage	+3.3V 16.8 A (0.3 A min)	+5V 12 A (0.3 A min)	+12V 10 A (1.5 A min)	-5V 0.8 A	-12V 0.8 A	+5Vsb 2 A
ACE-4518AP	16.8 A (0.3 A min)	12 A (0.3 A min)	10 A (1.5 A min)	0.8 A	0.8 A	2 A
ACE-816A	16 A (0.2 A min)	15 A (1 A min)	12 A (0.2 A min)	0.3 A	0.3 A	2 A
Efficiency	72% (ACE-816A), 68% (ACE-4518AP)					
Temperature	ACE-4518AP/816A: 0 ~ 50 °C (Operating), -20 ~ 80 °C (Storage)					
MTBF(hrs)	100,000					
Output Connector	ACE-4518AP: 20-pin ATX, 4-pin 12 V CPU, FDD and 3 x HDD ACE-816A: 20-pin ATX, FDD and 3 x HDD					
Dimensions	150 x 81.5 x 40.5 (mm)					

CB     **PFC**

Dimensions

180W

Ordering Information

Part No.	Description
ACE-4518AP-RS	180W AC-DC 1U ATX Power Supply, with PFC
ACE-816A-RS	150W AC-DC 1U ATX Power Supply

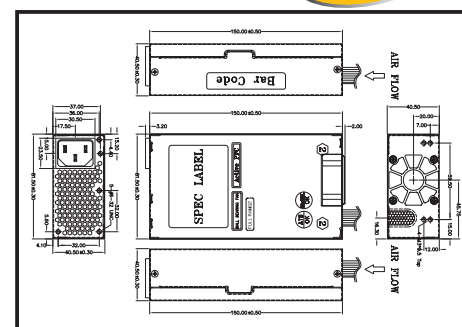
ACE-A615A

11
Embedded
System12
Industrial
Computer
Chassis13
Power
Supply14
Peripherals

Product	ACE-A615A-RS				
Input Type	90~264 VAC Full Range				
Output Voltage	+3.3 V 10 A (0.3 A min.)	+5 V 13 A (0.3 A min.)	+12 V 10 A (1 A min.)	-12 V 0.5 A (0 A min.)	+5 Vsb 2.0 A (0 A min.)
Efficiency	68 %				
Temperature	Operating : 0 °C~ 50 °C Storage : -20 °C~ 80 °C				
MTBF(hrs)	100,000 hr				
Output Connector	20-pin ATX, 4-pin 12 V CPU, FDD and 3 x HDD				
Dimensions	150 x 81.5 x 40.5 (mm)				

CB     **PFC****NEW**

Dimensions

150W

Ordering Information

Part No.	Description
ACE-A615A-RS	150W AC-DC 1U flex ATX Power Supply, with PFC