


# PAC-1700G

## 7-slot Full-size Compact Chassis

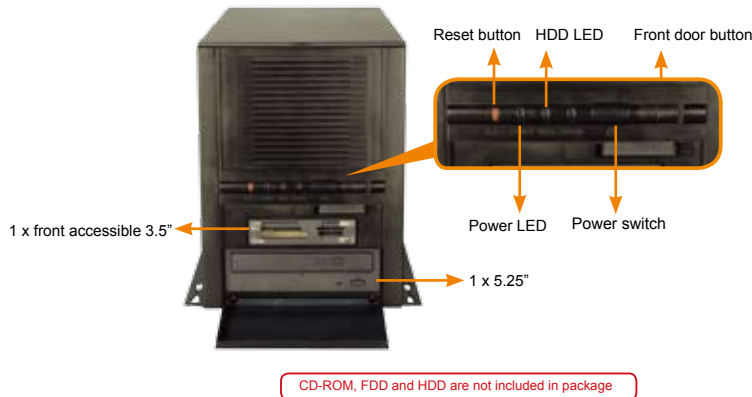

### Features

- ◆ RoHS compliant design
- ◆ One 5.25" and one 3.5" drive bay
- ◆ Two 3.5" internal HDD bays
- ◆ Seven expansion slots, compatible with full-size SBC
- ◆ 7 expansion slots, compatible with full-size SBC

### Specifications


◆ Construction	Metal with plastic front panel
◆ SBC Form Factor	Full-size, slot CPU card
◆ Drive Bays	1 x front-accessible 3.5"
	1 x 5.25"
	2 x 3.5" HDD
◆ Cooling Fans	1 x 8cm
◆ I/O openings	1 x LPT, 2 x COM
◆ Expansion Slots	7 slots
◆ Indicators	Power, HDD
◆ Button	power switch, reset
◆ Operating Temperature	0°C~50°C
◆ Operation Humidity	10% ~ 90%
◆ Color	B: Black
◆ Weight (Net/ Gross)	6 kg / 8.4 kg
◆ Dimensions (DxWxH)	433 mm x 233 mm x 253.7 mm

### Ordering Information

Part No.	Description
PAC-1700GB/ ACE-832AP	7-slot full-size chassis, black, with ACE-832AP-RS, RoHS




Replaceable fan filter



8 cm cooling fan

### Dimensions

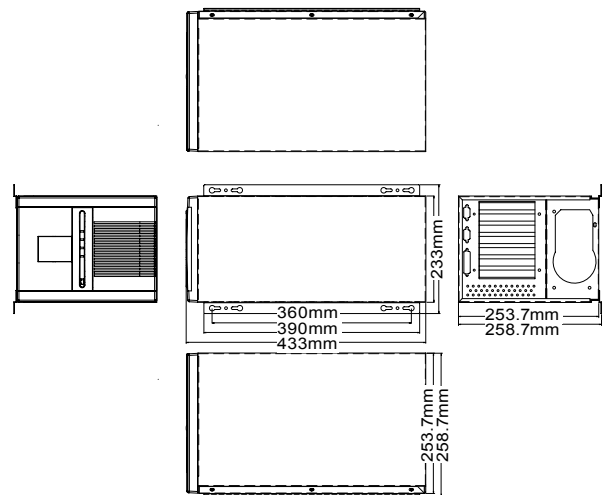

### Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe			PSU Connector
				x1	x4	x16	
IP-7SA-RS-R40	PCISA	4	2	0	0	0	AT
PCI-7S-RS-R40	PICMG 1.0	4	3	0	0	0	AT/ATX
<sup>1</sup> PE-7S-R40	PICMG 1.3	3	0	2	0	1	ATX
<sup>1</sup> PE-7S2-R40	PICMG 1.3	1	0	4	0	1	ATX
HPE-7S1-R40	PCI/PICoE	4	0	2	0	0	ATX

<sup>1</sup> Only R20 or later version can support PICMG 1.3 backplane.

### Power Supply Options

Type	Model No.	Watt
AT	ACE-925AP-U-RS	250W
	ACE-940AP-RS	390W
ATX	ACE-832AP-RS	300W
	ACE-841AP-S-RS	400W

PAC-1700G can support single PS/2 PSU. For more models of IEI PSU, please visit [www.ieiworld.com](http://www.ieiworld.com).

1  
Application  
Server  
Platform

2  
Single  
Board  
Computer

3  
IBX Series  
POS PC

4  
AFOLUX  
POS  
Panel PC

5  
Video  
Capture  
Card

6  
KAMIO  
RISC

7  
IOVU  
Open HMI

8  
VITO  
Universal  
Controller

9  
DINO  
BLADE

10  
LCD  
Product  
Series

11  
Embedded  
System

12  
Industrial  
Computer  
Chassis

13  
Power  
Supply

14  
Peripherals